

DRG. No.




BL/D 6001 INST

USED ON

THIRD ANGLE PROJECTION

REMOVE ALL SHARP EDGES UNLESS SPECIFIED.

DO NOT SCALE - ASK.

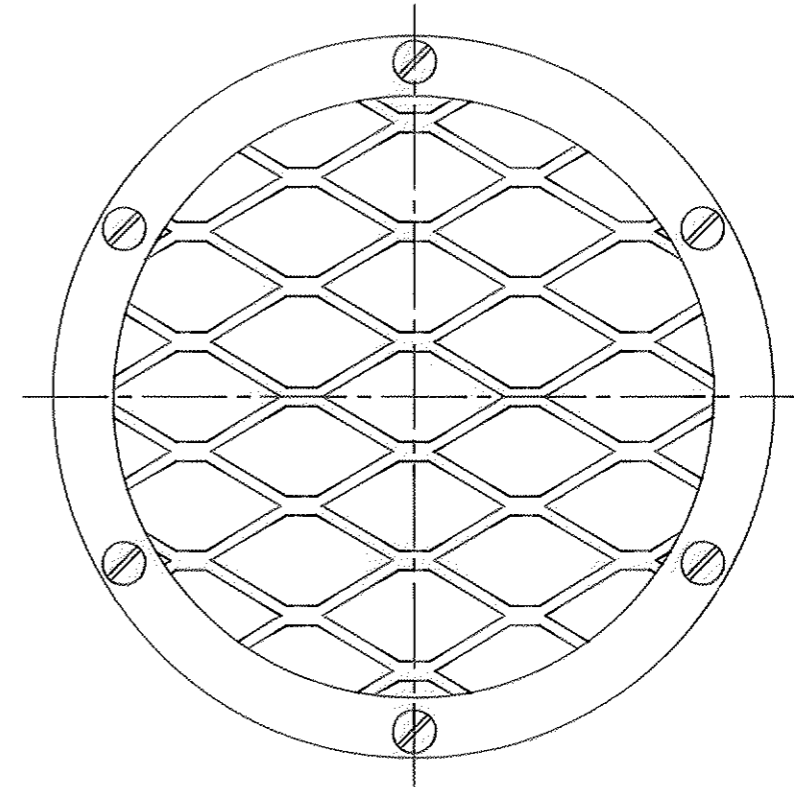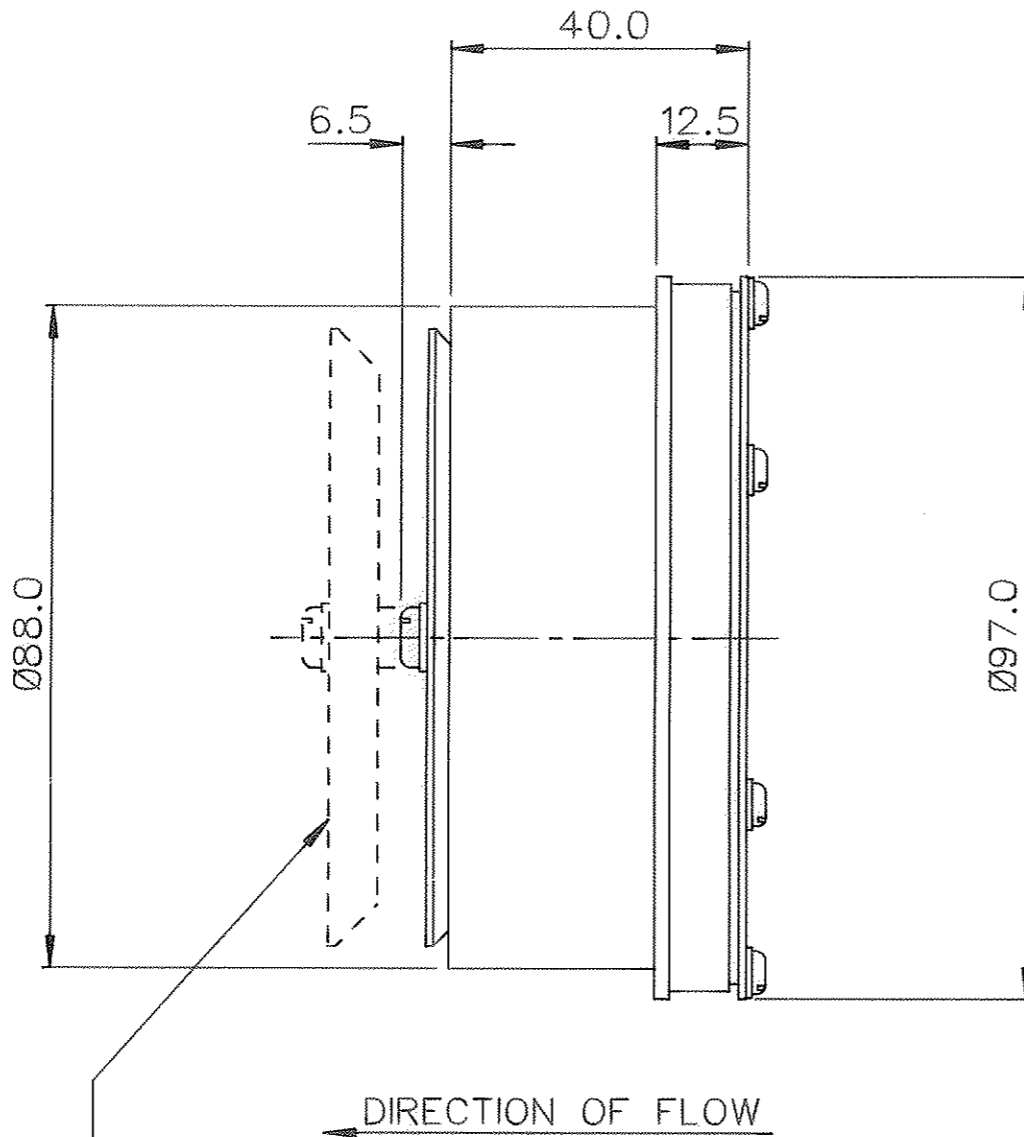

VALVE IN FULLY OPEN POSITION  
NOMINAL MOVEMENT 13.0

OPENING PRESSURE: 150 mbar  
NOMINAL FLOW RATE: 1000 SCFM AT 2.5 PSI

POPPET & FINISH CHANGED	4899	B	30/4/96
		A	15/6/91
CHANGE	MOD. No.	ISSUE	DATE

MATERIAL  
FLANGE & BODY  
ALUM ALLOY  
GUARD - M. STEEL

PROTECTIVE TREATMENT  
ALUM ALLOY  
ANODISED BLACK  
M. STEEL  
ZINC & PASS  
PAINTED BLACK

TOLERANCES  
UNLESS  
STATED

±1.0

DIMNS. IN ~~INS~~/m.m.

SCALE (ORIGINAL) 1 : 1

BROWNELL LTD. LONDON, N.W.10.

TITLE

RELIEF VALVE MODULE

CUSTOMERS REF.

DRAWN  
LJ

CHECKED  
K

DRAWING No.

BL/D 6001 INST

THIS DESIGN IS THE PROPERTY OF BROWNELL LTD.  
AND MAY NOT BE COPIED OR REPRODUCED  
WITHOUT THEIR PRIOR WRITTEN PERMISSION.